

Camelion®

Portable Lighting

Torch
Work Light
Head Light
Lantern
Camping Light




Product Catalogue

www.camelionbattery.com



More Energy Solutions

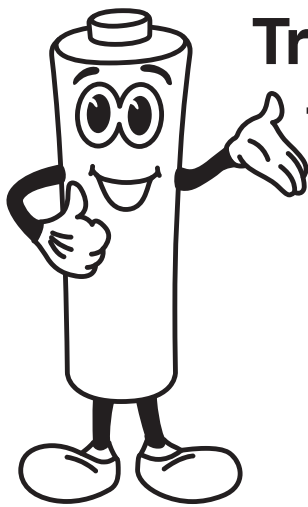

**Try us out
today!**

- Torch
- Work Light
- Head Light
- Lantern
- Search Light
- Camping Light
- Specialty Light

Content

Torch

Rechargeable

RT301, RT302	4
RT308, RT309	5
RT316, RT317	6
RT318, RT393	7
RS945, RS946	8
RS933, RS934	9
RS908	10

Non-Rechargeable

S804	10
T263, HP7011	11
FL1L2AA, FL1L2D	12
PT1L2AA, PT1L2D	13

Work Light

Rechargeable

RS931, RS935	14
RS940, RT254	15

Head Light

Rechargeable

RS903, RS920	16
RS921, RS930	17
RS218, RT256	18

Non-Rechargeable

S801, S808	19
------------	----

Lantern

Rechargeable

RS901, RS909	20
RS243	21

Non-Rechargeable

S245	21
------	----

Search Light

Rechargeable

RS225, RS932	22
--------------	----

Non-Rechargeable

S32, S90C	23
-----------	----

Camping Light

Rechargeable

RS915, RS916	24
RS919, RS919S	25
RS917A	25

Specialty Light

Non-Rechargeable

S66, S835	26
S816, T220L	27

Packing Detail



Torch (Rechargeable)



Aluminum



USB-C Rechargeable



Floodlight
Spotlight

Adjustable Focus



High
Medium
Low

3 Lighting Modes






RT301

Main Features

- Ultra-high bright - up to 2000 lm
- 3 lighting modes: High / Medium / Low
- Adjustable beam focus for various lighting needs
- Long operating time up to 16 h
- Tactical construction with soft anti-slip grip design
- Rechargeable with USB-C port

Specifications

Power Source: 3.7V 2000mAh 18650 Li-ion battery
 Light Source: 34W COB
 Lighting Modes: High / Medium / Low
 Light Output: 2000 lm / 1000 lm / 200 lm
 Beam Distance: 80 m
 Run Time: High: 2 h / Medium: 4 h / Low: 16 h
 CCT: 5500 - 7000K
 Charging Time: 3.5 h
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Dimensions(D x H): 36 x 167mm / 1.42 x 6.57 in
 Weight: 210 g / 0.46 lb




Aluminum



USB-C Rechargeable



Floodlight
Spotlight

Adjustable Focus



High
Medium
Low

3 Lighting Modes






RT302

Main Features

- Ultra-high bright - up to 4000 lm
- 3 lighting modes: High / Medium / Low
- Adjustable beam focus for various lighting needs
- Long operating time up to 21 h
- Tactical construction with soft anti-slip grip design
- Rechargeable with USB-C port

Specifications

Power Source: 3.7V 4000mAh Li-ion battery pack
 Light Source: 76W COB
 Lighting Modes: High / Medium / Low
 Light Output: 4000 lm / 2000 lm / 400 lm
 Beam Distance: 100 m
 Run Time: High: 3 h / Medium: 6 h / Low: 21 h
 CCT: 5500 - 7000K
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Charging Time: 5.5 h
 Dimensions(D x H): 36 x 232 mm / 1.42 x 9.13 in
 Weight: 310 g / 0.68 lb




Torch (Rechargeable)



Aluminum



Digital Display

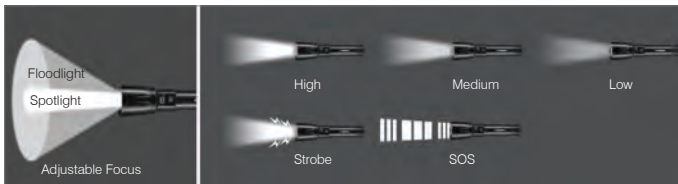

RT308

Main Features

- Powerful LED light source
- Super high brightness up to 600 lm
- 5 lighting modes with adjustable beam focus
- Impressive beam distance up to 550 m
- Durable aluminum alloy construction, resistant to scratches and corrosions
- Digital display for easily monitoring the power levels

Specifications


Power Source: 3.7V 2000mAh 7.4Wh 18650 Li-ion Battery
 Light Source: 1×10W LED
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Lumen Output: High: 600 lm / Medium: 300 lm / Low: 60 lm
 Run Time: High: 3.5 h / Medium: 6 h / Low: 18 h
 CCT: 7000 - 8000K
 Beam Distance: 550 m
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Charging Time: 4 h
 Dimensions (D x H): 40×160 mm / 1.57×6.30 in
 Net Weight: 190 g / 0.42 lb



Aluminum



Digital Display

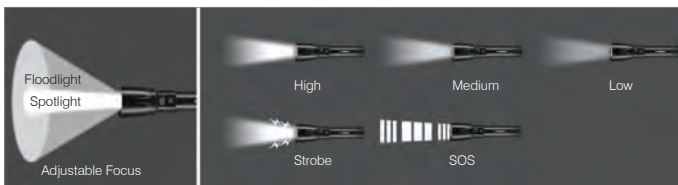

RT309

Main Features

- 20W super powerful white laser LED chip
- 1200-lumen ultra-bright illumination
- Ultra long beam distance up to 800 m
- 5 lighting modes with adjustable beam focus cater
- 5000mAh large capacity extends operating time up to 16 h
- Durable aluminium alloy construction, resistant to scratches and corrosions
- Digital display for easy power level monitoring
- USB-C rechargeable


Specifications

Power Source: 3.7V 5000mAh 18.5Wh 21700 Li-ion Battery
 Light Source: 1×20W White Laser LED
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Light Output: High: 1200 lm / Medium: 600 lm / Low: 100 lm
 Run Time: High: 5 h / Medium: 10 h / Low: 16 h
 CCT: 8000 - 9000K
 Beam Distance: 800 m
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Charging Time: 6 h
 Dimensions (D x H): 50×185 mm / 1.97×7.28 in
 Net Weight: 310 g / 0.68 lb

Torch (Rechargeable)



Aluminum

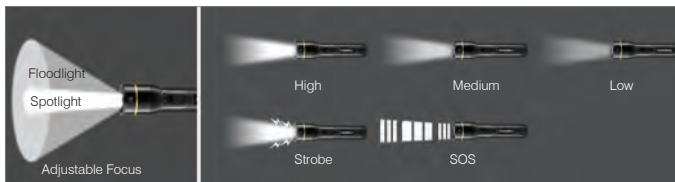

RT316

Main Features

- 30W high-power white LED chip
- 2000 lm ultra-bright illumination
- Long beam distance up to 600 m
- 5 lighting modes with adjustable focus
- Extended runtime up to 16 h
- Power bank function for mobile devices
- Durable aluminum alloy, scratch & corrosion resistant
- USB-C rechargeable

Specifications

Power Source: 3.7V 5000mAh, 18.5Wh 26650 Li-ion Battery
 Light Source: 1 × 30W White LED Chip
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Light Output: High: 2000 lm / Medium: 1000 lm / Low: 100 lm
 Run Time: High: 3 h / Medium: 6 h / Low: 16 h
 CCT: 8000 - 9000K
 Beam Distance: 600 m
 Charging Time: 4-5 h
 USB-C Input: 5V $\overline{=}$ 2A
 USB-C Output: 5V $\overline{=}$ 2A
 Material: Aluminium
 Dimensions (D x H): 43.5 × 170 mm / 1.71×6.69 in
 Net Weight: 330 g / 0.73 lb


RT317

Main Features

- 15W super powerful white LED chip
- 1000-lumen ultra-bright illumination
- Ultra long beam distance up to 500 m
- 5 lighting modes with adjustable beam focus
- Extended operating time up to 12 h
- Power bank function for mobile devices
- Durable aluminium alloy construction, resistant to scratches and corrossions
- USB-C rechargeable



Aluminum

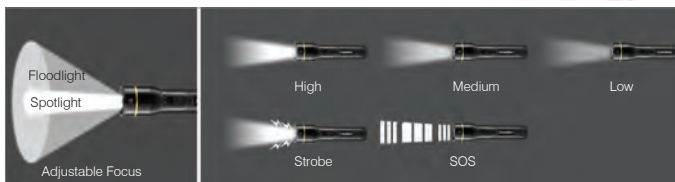

Specifications

Power Source: 3.7V 2200mAh 8.14Wh 18650 Li-ion Battery
 Light Source: 1 × 15W White LED
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Light Output: 1000 lm / 500 lm / 100 lm
 CCT: 8000 - 9000K
 Beam Distance: 500 m
 Run Time: High: 3 h / Medium: 6 h / Low: 16 h
 Charging Time: 4 h
 USB-C Input: 5V $\overline{=}$ 2A
 USB-C Output: 5V $\overline{=}$ 2A
 Material: Aluminium
 Dimensions (D x H): 35 × 153 mm / 1.38×6.02 in
 Net Weight: 180 g / 0.40 lb

Torch (Rechargeable)



Aluminum



RT318

Main Features


- 3W high-efficiency white LED chip
- 300-lumen high-bright illumination
- Long beam distance up to 200 m
- 3 lighting modes with adjustable beam focus for different scenarios
- Durable aluminium alloy construction, resistant to scratches and corrosions
- USB-C rechargeable

Specifications


Power Source: 3.7V 1200mAh 4.44Wh 18650 Li-ion Battery
 Light Source: 1 × 3W LED
 Lighting Modes: High / Low / Strobe
 Light Output: 300 lm / 150 lm
 CCT: 8000 - 9000K
 Beam Distance: 200 m
 Run Time: High: 2.5 h / Low: 4.5 h
 USB-C Input: 5V = 1A
 Charging Time: 2 h
 Material: Aluminium +ABS
 Dimensions (D x H): 28 × 121 mm / 1.10×4.76 in
 Net Weight: 115 g / 0.25 lb



Aluminum

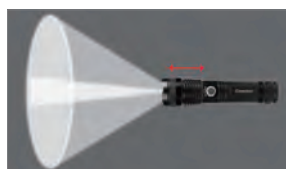

Adjustable Focus



5 Lighting Modes



RT393

Main Features

- USB-C rechargeable with power indicator.
- 1200-lumen 20W LED provides super bright light.
- 5 lighting modes with adjustable focus: 100%, 50%, 25%, Strobe and SOS.
- Made of high quality aircraft aluminum and resistant to scratches, abrasions and corrosion.


Specifications

Power Source: 3.7V, 2000 mAh 18650 Lithium Battery
 Light Source: 1 x 20W LED
 Lighting Modes: 100% / 50% / 25% / Strobe / SOS
 Light Output: 100%: 1200 lm / 50%: 600 lm / 25%: 300 lm
 CCT: 6000 - 10000K
 Beam Distance: 150 m
 USB-C Input: 5V = 1A
 Charging Time: 3 h
 Run Time: 100%: 2 h / 50%: 4 h / 25%: 8 h
 Dimensions (D x H): 42 x 167 mm / 1.65 x 6.57 in
 Weight: 235 g / 0.52 lb

Torch (Rechargeable)



Plastic

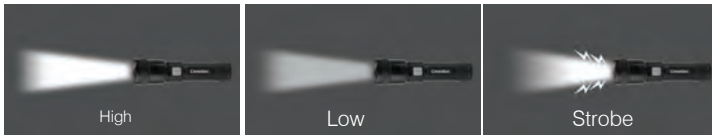

RS945

Main Features


- Powerful LED illumination
- Up to 200 lumens of brilliant brightness
- 3 lighting modes with adjustable beam focus
- Lightweight & durable design for everyday use
- Power bank function for mobile devices
- Universal Type-C charge, no disposable batteries.

Specifications

Power Source: 3.7V 1200mAh, 4.44Wh 18650 Li-ion battery
 Light Source: 1 x 3W LED
 Lighting Modes: High / Low / Strobe
 Light Output: LED: 200 lm (High) / 80 lm (Low)
 Run Time: 4 h / 8 h
 USB-C Input: 5V $\overline{\text{---}}$ 0.8A
 Charging Time: 3.5 h
 USB-A Output: 5V $\overline{\text{---}}$ 1A
 Dimensions(D x L): 46 x 168 mm / 1.81 x 6.61 in
 Weight: 105 g / 0.23 lb



Plastic



RS946

Main Features

- Powerful LED light source
- High brightness up to 200 lm
- 4 lighting modes with adjustable beam focus for various lighting needs
- Foldable work light
- Lightweight and durable design

Specifications

Power Source: 3.7V 1800mAh 6.66Wh 18650 Li-ion battery
 Light Source: 1 x 3535 8W LED + 1 x 2W COB
 Lighting Modes: High / Low / Strobe / COB Work Light
 Light Output: 200 lm (High) / 60 lm (Low) / 130 lm (COB Work Light)
 CCT: LED 8000 - 10000K, COB 7000 - 8000K
 Run Time: 3 h (High) / 7 h (Low) / 8 h (COB Work Light)
 Beam Distance: 300 m
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Charging Time: 3.5 h
 Dimensions(D x L): 52 x 198 mm / 2.05 x 7.8 in
 Weight: 155 g / 0.34 lb

Torch (Rechargeable)

RS933

Main Features

- 2-in-1 Flashlight and Work Light
- High brightness up to 160 lm
- 4 lighting modes for various lighting scenarios
- Adjust beam focus for spotlight or floodlight use
- Super long beam distance up to 200M
- Quick & easy attachment with spring hook
- Durable, lightweight and portable
- USB-C rechargeable with charging indicator

Specifications

Lighting Modes	Flashlight			Work Light
	High	Low	Flashing	On
Light Output	160 lm	70 lm	/	150 lm
Run Time	5 h	10 h	/	8 h
CCT	8000 - 10000K		/	6500K

Power Source: 3.7V 1200mAh 4.44Wh Li-ion battery

Light Source: 1 x 3W LED + 7 x 0.5W LED

Beam Distance: 200 m

USB-C Input: 5V $\overline{\text{---}}$ 0.5A

Charging Time: 3 h

Dimensions(L x W x H):

158 x 30.5 x 30.5 mm / 6.22 x 1.20 x 1.20 in

Weight: 85 g / 0.19 lb



RS934

Main Features

- 3-in-1 multifunction: Flashlight, Camping Light and Work Light
- High brightness up to 110 lm
- 4 lighting modes for various lighting scenarios
- Adjust beam focus for spotlight or floodlight use
- Super long beam distance up to 195M
- Quick & easy attachment with spring hook
- Durable, lightweight and portable
- USB-C rechargeable with charging indicators

Specifications

Lighting Modes	Flashlight / Camping Light		Work Light
	On	Strobe	On
Light Output	110 lm	/	80 lm
Run Time	8 h	/	10 h
CCT	7000 - 8000K		6500K

Power Source: 3.7V 1200mAh 4.44Wh Li-ion battery

Light Source: 1 x XPE LED + 7 x 2835 LED

Beam Distance: 195 m

USB-C Input: 5V $\overline{\text{---}}$ 1A

Charging Time: 3 h

Dimensions:


Light (L x W x H): 170 x 32 x 32 mm / 6.69 x 1.26 x 1.26 in

Shade (D x H): 55 x 45 mm / 2.17 x 1.77 in

Weight: 92 g / 0.20 lb



Torch (Rechargeable)

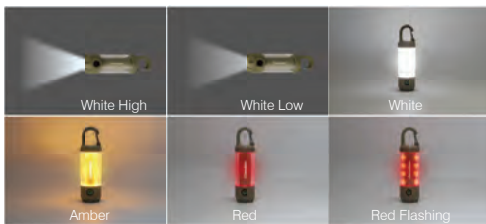

RS908

Main Features

- 2-in-1 multifunction: flashlight, camping light
- 6 lighting modes for various scenarios
- High brightness up to 200 lm
- Spring hook for easy hanging
- Ultra compact & lightweight

Specifications

Flashlight:

Light Source: 1 x 5W XTE LED
 Light Modes: White High / White Low
 Light Output: White High: 200 lm / White Low: 100 lm
 Run Time: White High: 3.5h / White Low: 4.5 h
 CCT: 6000-7000K
 Beam Distance: 35 m


Camping Light:

Light Source: 18 SMD(12 x White + 4 x Amber + 2 x Red)
 Lighting Modes: White / Amber / Red / Red Flashing
 Light Output: White: 40 lm / Amber: 40 lm
 Run Time: White: 3 h / Amber: 7 h
 CCT: White: 6500 - 7500K / Amber: 1500 - 2000K

Power Source:

3.7V 1200mAh 4.44Wh 18650 Li-ion battery
 USB-C Input: 5V \square 0.5A
 Charging Time: 3 h
 Dimensions (D x H): 37 x 128 mm / 1.46 x 5.04 in
 Net Weight: 95 g / 0.21 lb

Torch (Non-Rechargeable)

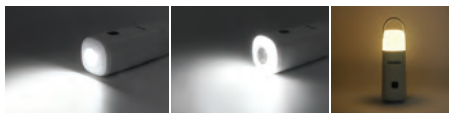

S804

Main Features

- 2-in-1 multifunction: camping lantern & flashlight
- 100 lumens high brightness
- Powered by AA batteries for easy replacement
- Long runtime: up to 40 hours
- 3 lighting modes for various scenarios
- Elegant design, lightweight and easy to carry

Specifications

Power Source: 3 x AA 1.5V battery
 Light Source: 1 x XPE LED + 8 x 2835 LED (Cool White)
 + 4 x 2835 LED (Warm White)
 Lighting Modes: Spotlight / Floodlight / Lantern
 Light Output: 100 lm / 75 lm / 75 lm
 Run Time: 25 h / 40 h / 40 h
 CCT: 8000 - 9000K / 6000 - 7000K / 3000 - 4000K (Lantern)
 Beam Distance: 50 m
 Material: ABS
 Product Dimensions (L x W x H): 46 x 46 x 130 mm / 1.81 x 1.81 x 5.12 in
 Product Weight: 78 g / 0.17 lb

Torch (Non-Rechargeable)




T263

Main Features

- Powerful LED light source
- Super high brightness up to 300 lm
- 5 lighting modes with adjustable beam focus for various lighting needs
- Super long beam distance up to 200 m
- Made of Aircraft aluminum anodized surface
- Portable, anti-slip grip design and attractive appearance

Specifications

Power Source: 3×AAA 1.5V battery
 Light Source: 1×XML-T6 10W LED
 Lighting Modes: High / Medium / Low / Strobe / SOS
 Light Output:
 High: 300 lm / Medium: 150 lm / Low: 75 lm
 Run Time: High: 3 h / Medium: 6 h / Low: 13 h
 CCT: 7000 - 9000K
 Beam Distance: 200 m
 Dimensions(D x H): 35×126 mm / 1.38×4.96 in
 Net Weight: 80 g / 0.18 lb

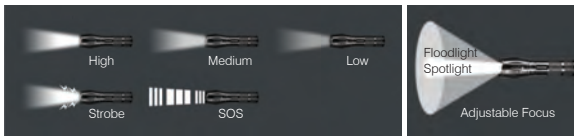

HP7011

Main Features

- Durable TPE material
- Shock-resistant of up to 3 meters
- Compact and lightweight
- Weatherproof
- Lanyard included

Specifications

Power Source: 3 x AAA size batteries
 Light Source: 1 x Osram 3030 LED
 Lighting Modes: On / Off
 Light Output: 150 lm
 CCT: 6500K
 Beam Distance: 120 m
 Run Time: 5 h
 Dimensions(D x H): 36.5 x 105 mm / 1.44 x 4.13 in
 Weight: 54 g / 0.12 lb



Torch (Non-Rechargeable)



FL1L2AA

Main Features

- 80% more energy efficient than traditional incandescent flashlights
- Long working time
- Slim & durable

Specifications

Power Source: 2 x AA size batteries
Light Source: 3030 1W LED
Lighting Modes: On / Off
Light Output: 100 lm
Run Time: 16 h
CCT: 6000 - 8000K
Beam Distance: 80M
Dimensions(D x H): 36 x 146 mm / 1.42 x 5.75 in
Weight: 40 g / 0.09 lb
Available Colors: Red / Blue / Black / Yellow



FL1L2D

Main Features

- 80% more energy efficient than traditional incandescent flashlights
- Super long working time
- Slim & durable

Specifications

Power Source: 2 x D size batteries
Light Source: 3030 1W LED
Lighting Modes: On / Off
Light Output: 100 lm
CCT: 6000-8000K
Beam Distance: 150 m
Run Time: 65 h
Dimensions(D x H): 60 x 191 mm / 2.36 x 7.52 in
Weight: 100 g / 0.22 lb
Available Colors: Red / Blue / Black / Yellow

Torch (Non-Rechargeable)



PT1L2AA

Main Features

- Durable TPE material
- Shock-resistant of up to 2 meters
- Lanyard included
- IP rating: IPX7

Specifications

Power Source: 2 x AA size batteries
Light Source: 1 x 8mm Straw Hat LED
Lighting Modes: On / Off
Light Output: 45 lm
Run Time: 20 h
Dimensions(D x H): 48 x 150 mm / 1.89 x 5.91 in
Weight: 185 g / 0.41 lb
Available Colors: Red / Blue



PT1L2D

Main Features

- Durable TPE material
- Shock-resistant of up to 1 meter
- Lanyard included
- IP rating: IPX7

Specifications

Power Source: 2 x D size batteries
Light Source: 1W LED
Lighting Modes: On / Off
Light Output: 100 lm
Run Time: 100 h
CCT: 6000 - 8000K
Dimensions(D x H): 68 x 203 mm / 2.68 x 7.99 in
Weight: 245 g / 0.54 lb
Available Colors: Red / Blue

Work Light (Rechargeable)



RS931


Main Features

- 3-in-1 multifunction: work light, camping light and mobile power
- 6 lighting modes for various scenarios
- Super high brightness of 1000 lm
- Super long operating time up to 12 h
- Stepless dimming for adjusting brightness easily
- Multi-fixing methods suitable for various purposes
 - 360° rotatable bracket
 - Strong magnet
 - Tripod standard holding-hole
 - Spring buckle
- USB-C recharging port
- Super compact & lightweight

Specifications

Lighting Modes	Main Light				Auxiliary Light	
	Neutral White	Cool White	Warm White	Red	Amber	SOS
Light Output	1000 lm	650 lm	500 lm	/	50 lm	/
Run Time	4 h	6 h	6 h	/	12 h	/
CCT	4000-5000K	5000-6000K	3000-3500K	/	2000-3000K	/

Power Source: 3.7V 3000mAh 21700 Li-ion battery
 Light Source: 1×COB + 2×Filament LED + 5×Red LED
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Charging Time: 4.5 h
 USB-A Output: 5V $\overline{\text{---}}$ 1A
 Dimensions(L x W x H): 93×30×98 mm / 3.66×1.18×3.86 in
 Weight: 180 g / 0.40 lb

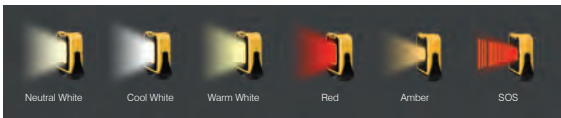

Applications



RS935

Main Features

- 3-in-1 multifunction: Work Light, Camping Light and Colorful Warning Light
- Super high brightness up to 1000 lm
- 5 basic lighting modes for various scenarios
- Adjustable brightness and correlated color temperature
- Foldable handle, wide usability
- USB-C rechargeable with charging indicator

Specifications

Lighting Modes	Work Light / Work Light + Warning Light (Solid Red) / Work Light + Warning Light (Red Flashing) / Warning Light (Solid Red) / Warning Light (RGB Flashing in Sequence)		
Work Light Modes	White	White+Amber	Amber
Light Output	1000 lm	550 lm	300 lm
Run Time	2.5 h	4 h	4 h
CCT	6000 - 7000K	/	1500 - 2000K

Power Source: 3.7V 3000mAh 11.1Wh 21700 Li-ion battery
 Light Source: 52 x White LED + 18 x Amber LED + 11 x RGB LED
 Switch Type: Button Switch + Rotary Switch
 USB-C Input: 5V $\overline{\text{---}}$ 1.5A
 Charging Time: 5 h
 Dimensions: 96 x 67 x 44 mm / 3.78 x 2.64 x 1.73 in
 Net Weight: 130 g / 0.29 lb



Work Light (Rechargeable)




RS940

Main Features

- 2-in-1 multifunction: Torch and Work Light
- 6 lighting modes for various lighting scenarios
- 150 lm high brightness
- Digital display for easy power level monitoring
- Pen shape & size, perfect fit in hands
- USB-C rechargeable

Specifications

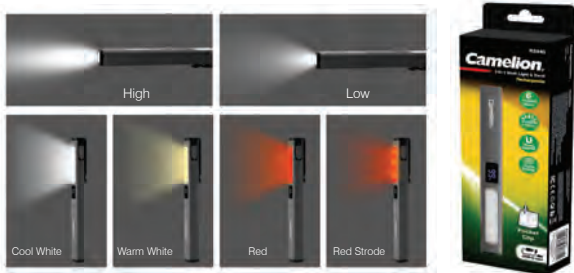

	Torch	Work Light
Light Source	1 x XTE LED	5 x White SMD + 2 x Warm SMD + 2 x Red SMD
Lighting Mode	High / Low	Cool White / Warm White / Red / Red strobe
Light Output	High:150 lm / Low: 50 lm	Cool White / Warm White: 40 lm
Run Time	High: 2 h / Low: 4.5 h	Cool White / Warm White: 1.5 h
CCT	6500 - 7000K	Cool White: 6500 - 7000K / Warm White: 2800 - 3200K

Power Source: 1 x 3.7V 400mAh 1.48Wh Li-ion rechargeable battery
 Beam Distance: 25 m
 USB-C Input: 5V $\overline{\text{---}}$ 0.5A
 Charging Time: 1 h
 Dimensions (L x W x H): 22 x 18 x 176 mm / 0.87 x 0.71 x 6.93 in
 Weight: 45 g / 0.10 lb



RT254

Main Features

- 4-in-1 multifunctional
- Powerful wide-angle illumination
- Mini work light, keychain light, bottle opener and screwdriver in one
- Hands-free operation
- 7 lighting modes
- Super compact and lightweight
- Ultra-high brightness up to 420 lm
- Rechargeable with USB-C port

Specifications



Lighting Modes	Cool White		Neutral White		Red	Red Flashing	Cool White + Neutral White
	High	Low	High	Low			
Light Output	200 lm	65 lm	220 lm	70 lm	/	/	420 lm
Run Time	2.5 h	3.5 h	2 h	2.5 h	/	/	1.5 h
CCT	7000 - 8000K		4000 - 5000K		/	/	5000 - 6000K

Power Source: 3.7V, 500mAh rechargeable Li-polymer battery
 Light Source: COB (White: 5W + Amber: 3W + Red: 0.5W)
 USB-C Input: 5V $\overline{\text{---}}$ 0.5A
 Charging Time: 1.5 h
 Beam Distance: 30 m

Applications



Head Light (Rechargeable)

RS903

Main Features

- Wave sensor controllable within 10 cm
- 5 lighting modes for various lighting scenarios
- 2 lighting switches – manual button + wave sensor
- 90°adjustable light angle
- Rechargeable via USB-C port



Specifications

Power Source: 3.7V, 500mAh Li-polymer Battery

Lighting Source: 1W White LED + 0.2W Red LED

Lighting Mode:

White Low / White Medium / White High / Red / Red Flashing

Light Output:

White Low: 20 lm / White Medium: 50 lm / White High:100 lm

Beam Distance: 20 m

Run Time:

White Low: 9 h / White Medium: 5 h / White High: 4 h

CCT: 6000 - 7000K

Sensor Distance: 10 cm

USB-C Input: 5V $\overline{\text{---}}$ 0.5A

Charging Time: 1.5 h


Dimensions(L x W x H): 70 x 35 x 32 mm / 2.76 x 1.38 x 1.26 in

Net Weight: 60 g / 0.13 lb

RS920

Main Features

- Wave sensor controllable within 10 cm
- High brightness up to 300 lm
- 6 lighting modes for various lighting scenarios
- Dual switch: manual switch + sensor switch
- 90° adjustable light angle



Specifications

Power Source: 3.7V 800mAh 2.96Wh Li-polymer battery

Light Source: 2 x XPG LED + 4 x Red SMD

Lighting Modes: Cool White / Warm White / Cool White + Warm White / Red / Red Flashing / Turbo

Light Output: Cool White: 140 lm / Warm White: 130 lm / Cool White + Warm White: 160 lm / Turbo: 300 lm

Run Time:

Cool White: 4 h / Warm White: 4 h / Cool White + Warm White: 3.5 h

CCT : Cool White: 6000 - 7000K /

Warm White: 2500 - 3500K / Cool White + Warm White: 4500 - 5500K /

Turbo: 4500 - 5500K

Beam Distance: 50 m

USB-C Input: 5V $\overline{\text{---}}$ 0.5A

Charging Time: 2 h

Dimensions(L x W x H): 52 x 34 x 30 mm / 2.05 x 1.34 x 1.18 in

Weight: 57 g / 0.13 lb

Head Light (Rechargeable)




RS921

Main Features

- Wave sensor controllable within 10 cm
- High brightness up to 480 lm
- 3 lighting modes for various lighting scenarios
- Stepless dimming allows easy adjustment of light brightness
- Dual switch: manual switch + sensor switch
- 60° adjustable light angle

Specifications

Power Source: 3.7V 1800mAh 6.66Wh 103450 Li-polymer battery
 Light Source: 1 × 6W LED + 1 × 3W COB
 Lighting Modes: LED / COB / LED + COB
 Light Output:
 LED: 280 lm / COB: 300 lm / LED + COB: 480 lm
 Run Time: LED: 5 h / COB: 5 h / LED + COB: 2.5 h
 CCT: 6000 - 7000K
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Charging Time: 3 h
 Adjustable Angle: 60°
 Material: ABS
 Dimensions (L x W x H): 78 × 45 × 50 mm / 3.07 × 1.77 × 1.97 in
 Net Weight: 125 g / 0.28 lb

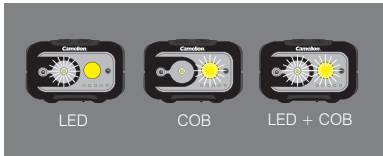


RS930

Main Features

- Wave on/off within 10 cm
- High brightness up to 150 lm
- 6 lighting modes for various lighting scenarios
- Long beam distance up to 35 m
- 3 lighting sources, super long lifespan
- Silicone headband, comfortable wearing

Specifications

Lighting Modes	White LED High / White LED Low / White LED High + COB / COB / Red LED / SOS			
	White LED High	White LED Low	White LED High + COB	COB
Light Output	75 lm	30 lm	150 lm	75 lm
Run Time	13 h	16 h	6 h	9.5 h
CCT	7000 - 8000K		6500 - 7500K	6000 - 7000K
Power Source: 3.7V, 800mAh 2.96Wh 14500 Li-ion battery Light Source: 1W White LED + 2 x 0.15W Red + 2 x 0.5W White COB Charging Time: 2.5 h USB-C Input: 5V $\overline{\text{---}}$ 0.5A Dimensions (L x W x H): 61 x 34 x 36mm / 2.4 x 1.34 x 1.42 in Net Weight: 60 g / 0.13 lb				

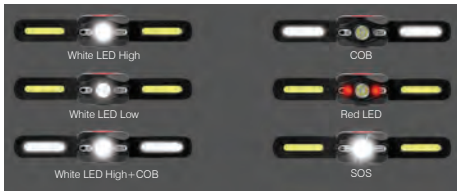

Head Light (Rechargeable)




RS218

Main Features

- 3W high power LED and 10W dual color COB
- Wave sensor with sensing distance of 10 cm
- Easy-to-use switch
- Six lighting modes: COB White High, COB White Low, LED, COB Red, COB Red Strobe, (COB + LED) White Strobe

Specifications

Power Source: 3.7V, 800mAh rechargeable Li-polymer battery
 Light Source: 3W LED + 10W COB
 Light Output: COB White High: 320 lm / COB White Low: 160 lm / LED: 150 lm
 Run Time: COB White High: 1.7 h / COB White Low: 2.1 h / LED: 3.5 h
 Beam Distance: 50 m
 USB-C Input: 5V $\overline{\text{---}}$ 0.6A
 Charging Time: 2.5 h
 Dimensions(L x W x H): 285 x 32 x 25 mm / 11.22 x 1.26 x 0.98 in
 Weight: 60 g / 0.15 lb




RT256

Main Features

- Dual independent lighting systems
- Ultra-high brightness up to 280 lm
- Multifunction as head light / lantern / work light
- 7 basic lighting modes & LED+COB free-combined modes
- Soft light with a frosted cap (removable)
- 60° adjustable light angle
- Integrated hook & clip & magnetic base

Specifications

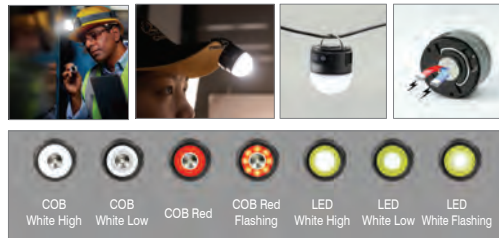

Lighting Modes	LED			COB				LED + COB
	High	Low	Flashing	White High	White Low	Red	Red Flashing	
Light Output	220 lm	120 lm	/	90 lm	45 lm	/	/	280 lm
Run Time	1.5 h	3.5 h		2 h	3.5 h			1 h
CCT	6000 - 7000K							

Power Source: 3.7V 500mAh Rechargeable Li-Polymer Battery
 Light Sources: 5W LED + 3W COB
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 Charging Time: 1 h
 Beam Distance: 60 m
 Dimensions(L x W x H): 45 x 41 x 54 mm / 1.77 x 1.61 x 2.13 in
 Net Weight: 70 g / 0.15 lb



Head Light (Non-Rechargeable)



S801

Main Features

- 4 lighting modes meet different lighting needs
- High brightness up to 120 lm
- 45° adjustable light angle
- Durable & lightweight
- Easy-to-use

Specifications

Power Source: 3 x AAA size batteries
 Light Source: 2W White LED + Red LED
 Light Output:
 White High / White Low / Red / Red Flashing
 Light Output: White High: 120 lm / White Low: 40 lm
 Run Time: White High: 3 h / White Low: 10 h
 CCT: 7000K
 Dimensions(L x W x H):
 61x 46 x 35 mm / 2.40 x 1.81 x 1.38 in
 Net Weight: 51 g / 0.11 lb

S808

Main Features

- Super bright COB lighting
- Easy-to-use switch
- 4 lighting modes
- Adjustable light angle

Specifications

Power Source: 3 x AAA size batteries
 Light Source: 1 x 3W COB LED
 Lighting Modes: High / Low / Strobe / SOS
 Light Output: High: 120 lm / Low: 30 lm
 Run time: High: 2 h / Low: 8 h
 CCT: 6000 - 7000K
 Dimensions(L x W x H):
 60 x 45 x 35 mm / 2.36 x 1.77 x 1.38 in
 Weight: 43 g / 0.09 lb



Lantern (Rechargeable)



RS901

Main Features

- High illumination of 400 lm
- 2 lighting modes for 360° cozy ambience
- Convenient handle for easy carrying or hanging
- Rechargeable via a USB-C port
- LED power indicator

Specifications

Lighting Mode	High	Low
Light Output	400 lm	100 lm
Run Time	2.5 h	7 h
Power Source: 3.7V, 1200mAh Lithium Battery Light Source: 12 x 0.5W SMD CCT: 2700K - 3700K Charging Time: 2.5 h USB-C Input: 5V $\overline{\text{---}}$ 1A Dimensions(D x H): 81 x 99 mm / 3.19 x 3.9 in Net Weight: 120 g / 0.26 lb		



RS909

Main Features

- High brightness up to 100 lm
- Quick recharge via a USB-C input port
- High-efficiency solar panel for free power from the sun outdoors
- 3 soft lighting modes creating a cozy ambience
- Stepless dimming switch allows easy adjustment of lighting modes / brightness
- Convenient handle for easy use

Specifications

Power Source: 3.7V 1200mAh 18650 rechargeable battery
 Light Source: Amber LED + Neutral White LED
 Switch: Rotary Switch
 Lighting Modes: Amber / Neutral White / Warm White
 Light Output: 100 lm
 Run Time: \geq 3 h
 USB-C Input: 5V $\overline{\text{---}}$ 0.5A / Solar Panel Input: 5V $\overline{\text{---}}$ 70mA Max.
 Charging Time: 2 h (USB-C Input)
 Dimensions(D x H): 108 x 138 mm / 4.25 x 5.43 in
 Weight: 205 g / 0.45 lb

Lantern (Rechargeable)




RS243

Main Features

- High illumination of 200 lm
- Effective 360° lighting
- Stepless Dimming meets different lighting needs
- Convenient hook for easy carrying or hanging
- Rechargeable via USB-C port

Specifications

Power Source: 3.7V, 800mAh 18650 Lithium Rechargeable Battery
Light Source: 3 x 1W COB
Lighting Mode: Stepless Dimming
Light Output: 200 lm (Max)
CCT: 5000 - 7000K
Run Time: 1.5-6.5 h
USB-C Input: 5V $\overline{\text{---}}$ 0.5A
Charging Time: 2 h
Dimensions(D x H): 116 x 184 mm / 4.57 x 7.24 in
Net Weight: 240 g / 0.53 lb

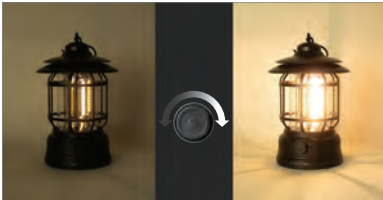

Lantern (Non-Rechargeable)






S245

Main Features


- 2 lighting modes: High / Low
- High illumination of 260 lm
- Effective 360° lighting
- Convenient hook for easy carrying or hanging

Specifications

Power Source: 3 x AA batteries
Light Source: 3 x 1W COB
Lighting Modes: High / Low
Light Output: High: 260 lm / Low: 70 lm
Run Time: High: 6 h / Low: 22 h
CCT: 3000 - 4000K
Dimensions(D x H): 116 x 178 mm / 4.57 x 7.01 in
Net Weight: 200 g / 0.44 lb



Search Light (Rechargeable)

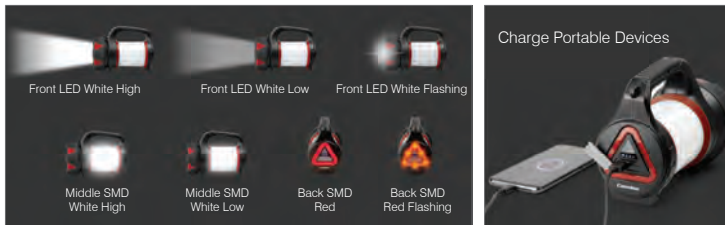

1000 Lumens

7 Lighting Modes

480 m

18H


RS225

Main Features

- 10W high power LED and dual color SMD
- Multifunctional as lighting and power supply
- 7 lighting modes
- Ultra-high illumination of up to 1000 lm
- Long beam distance up to 480 m
- Adjustable shoulder strap and ergonomic handle

Specifications

Power Source: 3.7V, 4800mAh lithium battery pack (built-in)
 Light Source: 10W LED + 104X SMD
 Light Output: Front LED White High: 1000 lm
 Front LED White Low: 470 lm
 Middle SMD White High: 420 lm
 Middle SMD White Low: 270 lm
 Beam Distance: 480 m
 Run Time: Front LED White High: 3.5 h
 Front LED White Low: 9.5 h
 Middle SMD White High: 10 h
 Middle SMD White Low: 18 h
 CCT: 5500 - 7000K
 USB-C Input: 5V $\overline{\text{---}}$ 1A
 USB-A Output: 5V $\overline{\text{---}}$ 1A
 Charging Time: 8 h
 Dimensions: 200 x 107 x 146 mm / 7.87 x 4.21 x 5.75 in
 Net Weight: 545±10 g / 1.20±0.02 lb

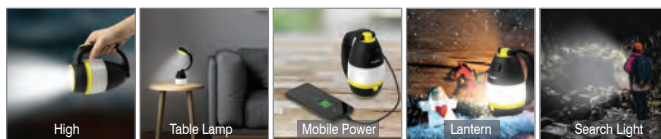

250 Lumens

250m

3 Lighting Modes

Power Bank

RS932

Main Features

- 4-in-1 multifunction: search light, lantern, table lamp and mobile power
- 3 lighting modes for various scenarios
- High brightness of 250 lm
- Convenient handle for easy carrying
- Super lightweight & practical
- USB-C rechargeable port


Specifications

Power Source: 3.7V 1500mAh 5.55Wh 18650 rechargeable Li-ion battery
 Light Source: LED + COB
 Lighting Modes: COB Low / COB High / LED
 Light Output:
 COB Low: 150 lm / COB High: 250 lm / LED: 160 lm
 Run Time: COB Low: 3 h / COB High: 1.5 h / LED: 2.5 h
 CCT : COB: 5000 - 6000K / LED: 6000 - 8000K
 Beam Distance: 250 m
 USB-C Input: 5V $\overline{\text{---}}$ 0.5A
 Charging Time: 4.5 h
 USB-A Output: 5V $\overline{\text{---}}$ 0.5A
 Dimensions(L x W x H): 155×130×85 mm / 6.10×5.12×3.35 in
 Weight: 245 g / 0.66 lb

Search Light (Non-Rechargeable)



LED Spotlight Modes:

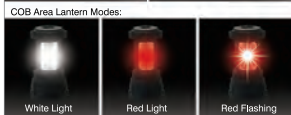

S32

Main Features

- 2-in-1 multifunction search light
- Five lighting modes including side panel
- Adjustable handle for ease of use in different scenarios
- IPX4 ingress protection

Specifications

Power Source: 3 x AA size batteries

Light Source: 3W White LED + 3W dual-color COB

Lighting Modes:

LED: High / Low

COB: White / Red / Red Flashing

Light Output:

LED: High: 230 lm / Low: 160 lm

COB: White 150 lm

Beam Distance: 200 m

Run Time:

LED: High: 4 h / Low: 6 h

COB: 6 h

Dimensions (L x W x H):

174 x 98 x 139 mm / 6.85 x 3.86 x 5.47 in

Weight: 325 g / 0.72 lb

S90C

Main Features

- High illumination of up to 260 lumens
- Super durable and long lifespan COB lighting source
- Comes with widely available 4 x AA batteries
- Compact and lightweight design makes it ideal for everyday use

Specifications

Power Source: 4 x AA size batteries

Light Source: 3W COB

Light Output: 260 lm

Run Time: 5 h

CCT: 6000 - 7000K


Dimensions (L x W x H):

146 x 105 x 110 mm / 5.75 x 4.13 x 4.33 in

Weight: 216 g / 0.48 lb



Camping Light (Rechargeable)

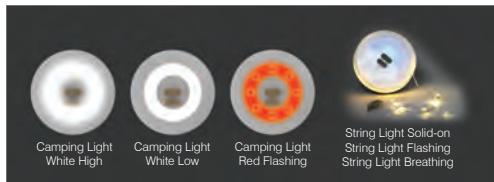

400 Lumens

6+ Lighting Modes

10m String Light Length

5H

RS915

Main Features

- Multifunction as camping light and string light
- High brightness up to 400 lm
- 6 basic lighting modes & SMD+LED free-combined modes
- 10-meter retractable LED string light
- Hidden hanging ring for easy carrying, hanging & retracting string light
- USB-C port input
- Compact & easy storage

Specifications

Power Source: 3.7V, 1800mAh 6.66Wh rechargeable Li-ion battery
Light Source: 36×SMD+100×LED
String Light: 10 m, Warm White
Lighting Modes:
 Camping Light: White High / White Low / Red Flashing
 String Light: Solid-on / Flashing / Breathing
Light Output:
 Camping Light: White High: 400 lm / White Low: 200 lm
Run Time:
 Camping Light: White High: 3 h / White Low: 5 h /
 String Light: Solid-on: 4.5 h
USB-C Input: 5V $\overline{\text{---}}$ 1A
Charging Time: 2.5 h
Dimensions(D x H): 119×41 mm / 4.69×1.61 in
Net Weight: 230 g / 0.51 lb



400 Lumens

6+ Lighting Modes

10m String Light Length

5H

RS916

Main Features

- Multifunction as camping light and string light
- High brightness up to 400 lm
- 6 basic lighting modes & SMD+LED free-combined modes
- 10-meter retractable LED string light
- Hidden hanging ring for easy carrying, hanging & retracting string light
- USB-C port input
- Compact & easy storage

Specifications

Power Source: 3.7V, 1800mAh 6.66Wh rechargeable Li-ion battery
Light Source: 36×SMD+100×LED (25×Red+25×Yellow+25×Blue+25×Green)
String Light: 10 m, Colourful
Lighting Modes:
 Camping Light: White High / White Low / Red Flashing
 String Light: Solid-on / Flashing / Breathing
Light Output:
 Camping Light: White High: 400 lm / White Low: 200 lm
Run Time:
 Camping Light: White High: 3 h / White Low: 5 h /
 String Light: Solid-on: 4.5 h
USB-C Input: 5V $\overline{\text{---}}$ 1A
Charging Time: 2.5 h
Dimensions(D x H): 119×41 mm / 4.69×1.61 in
Net Weight: 230 g / 0.51 lb

Camping Light (Rechargeable)



RS919 / RS919S

Main Features

- High brightness of 250 lm
- 2 brightness levels cater to different lighting needs
- Convenient USB-C charging port
- Practical hanging hook, ideal for illumination anywhere
- High-efficient solar panel from the sunshine (RS919S)

Specifications

Power Source: 3.7V 1200mAh 18650 Rechargeable Battery
Light Source: 2×Filament LED
Lighting Modes: High / Low
Light Output: High: 250 lm / Low: 75 lm
RunTime: High: 5.5 h / Low: 8.5 h
CCT: 2500 - 3000K
USB-C Input: 5V $\overline{\text{---}}$ 1A
Solar Panel: 5V $\overline{\text{---}}$ 40mA (RS919S)
Charging Time: 2.5 h
Dimensions(D x H): 180×110 mm / 7.09×4.33 in
Weight: 180 g / 0.40 lb


RS917A

Main Features

- Energy-efficient LED filament, extended lifespan
- Brilliant illumination up to 250 lumens
- Versatile lighting modes for every occasion
- Convenient USB-C charging port
- Practical hanging hook, ideal for illumination anywhere

Specifications

Power Source: 3.7V 400mAh 14500 Li-ion battery
Light Source: 2×Filament LED
Lighting Modes: High / Medium / Low
Light Output: High: 250 lm / Medium: 120 lm / Low: 75 lm
Run Time: High: 1.5 h / Medium: 2.5 h / Low: 5 h
CCT: 2500 - 3000K
USB-C Input: 5V $\overline{\text{---}}$ 0.5A
Charging Time: 1.5 h
Dimensions(D x H): 62×175 mm / 2.44×6.89 in
Weight: 55 g / 0.12 lb



Specialty Light (Non-Rechargeable)



S66

Main Features

- Small and compact
- Equipped with detachable base
- Sensor distance up to 4 meters
- 20 lm soft down light

Specifications

Power Source: 3 x AAA size batteries
Light Source: 2 x SMD2835
Light Output: 20 lm
Sensor Distance: 4 meters
Dimensions(L x W x H):
120 x 45 x 30 mm / 4.72 x 1.77 x 1.18 in
Weight: 56 g / 0.12 lb



S835

Main Features

- High brightness up to 250 lm
- Dual 3W COB LEDs for powerful performance
- Easy rotary dimmer for instant brightness control
- Mount anywhere with magnets, adhesive pads, or screws

Specifications

Power Source: 3 x 1.5V AAA Batteries
Light Source: 2 x (3.2V, 3W) COB
Lighting Mode: Stepless Dimming
Light Output: 250 lm (max)
Run Time: 2.5 h
CCT: 7000 - 8000K
Dimensions(L x W x H):
76.5 x 32 x 115 mm / 3.01 x 1.26 x 4.53 in
Weight: 73 g / 0.16 lb



Specialty Light (Non-Rechargeable)



S816

Main Features

- Durable COB lighting source
- Simple ON/OFF Control for easy operation
- Double-sided tape enables easy and convenient attachment anywhere.
- Universal AAA batteries, convenient and economic

Specifications

Power Source: 3 x AAA 1.5V battery
Light Source: 1 x 1W COB
Lighting Modes: ON / OFF
Light Output: 50 lm
Run Time: Up to 24 h
Material: ABS
Dimensions (D x H): 68 x 24.5mm / 2.68x0.96 in
Weight: 29 g / 0.06 lb



T220L

Main Features

- Elegant look & nice feel in hand with durable stainless steel body
- Convenient pocket clip
- Perfect size to fit in hands
- Easy to operate: one-button ON / OFF
- Used for medical diagnosis of ears, mouth, noses, etc

Specifications

Power Source: 2xAAA batteries
Light Source: LED
Light Output: 10 lm
CCT: 6000 - 8000K
Dimensions(D x L): 13x140 mm / 0.51x5.51 in
Weight: 25 g / 0.06 lb

Packing Detail

Model#	Item#	Packaging Details								
		Packaging Type	Batteries Included	Blister/Display Details			Outer Carton Details			
				Dimensions (mm)	Net Weight(g)	Packs/ Carton	Dimensions (cm)	Volume (M ³)	Net Weight (Kg)	Gross Weight (kg)
RT301	RT301-CBH	Box	18650	85 x 40 x 160	210	40	41.5 x 40.5 x 20	0.0336	10.4	11.6
RT302	RT302-CBH	Box	18650	118 x 42 x 302	310	24	55.5 x 27.5 x 28	0.0427	10.1	10.6
RT308	RT308-CBH	Box	18650	75 x 46 x 215	190	40	51 x 40.5 x 20	0.0413	9.3	9.9
RT309	RT309-CBH	Box	21700	100 x 57 x 243.5	310	24	46.5 x 38 x 25	0.0442	9.4	10.4
RT316	RT316-CBH	Box	26650	68 x 50 x 200	330	40	43 x 31 x 35	0.0467	16.4	17.4
RT317	RT317-CBH	Box	18650	67 x 40 x 196	180	40	37 x 36.5 x 26	0.0351	9.8	11.4
RT318	RT318-CBH	Box	18650	37 x 37 x 155	115	40	28.5 x 21.5 x 5.5	0.0156	5.7	6.5
RT393	RT393-TB	Blister Pack	18650	110 x 255 x 43	235	24	41 x 27.5 x 25.5	0.0288	6.6	7.5
RS945	/	/	18650	/	105	/	/	/	/	/
RS946	/	/	/	/	155	/	/	/	/	/
RS933	RS933-CBH	Box	/	70 x 35 x 185	85	96	60 x 35.5 x 28	0.0596	10.6	12.4
RS934	RS934-CBH	Box	/	58 x 58 x 220	92	72	41.5 x 39.5 x 40.5	0.0664	9.2	10.1
RS908	RS908-CBH	Box	/	53 x 40 x 160	95	80	44.5 x 29.5 x 26	0.0341	10.2	11
S804	S804-CBH	Box	/	50 x 50 x 168	78	80	29.5 x 21.5 x 26.5	0.0168	10.2	11
T263	T263-CBH	Box	/	76 x 40 x 215	80	60	45 x 40 x 28	0.0504	7.4	8.2
HP7011	HP7011-BP	Blister Pack	/	110 x 190 x 40	74	48	46.5 x 41.5 x 21.5	0.0415	3.7	4.8
	HP7011-3R03BP	Blister Pack	3R03P	110 x 190 x 40	54	48	51.5 x 21.5 x 26.5	0.0294	4.7	6.4
	HP7011-3R03PD24	Display Box	3R03P	318 x 216 x 115	54	4	46 x 34 x 25	0.0391	8.2	9.3
	HP7011D24	Display Box	/	318 x 216 x 115	54	4	46 x 34 x 25	0.0391	6	7.1
FL1L2AA	FL1L2AA2R6P	Blister Pack	2R6P	99 x 211 x 38	40	60	40 x 30 x 23	0.0276	5.3	5.7
	FL1L2AAD24	Display Box	/	230 x 154 x 150	40	8	48 x 33 x 32.5	0.0515	8.2	9.29
FL1L2D	FL1L2DR20P	Blister Pack	2R20P	158 x 292 x 64	100	24	46 x 31.5 x 31	0.0449	7.5	8.7
	FL1L2DD12	Display Box	/	250 x 188 x 195	100	4	51.5 x 40 x 21.5	0.0443	5.3	6.75
PT1L2AA	PT1L2AABP	Blister Pack	/	248 x 120 x 50	185	48	49.5 x 36 x 33	0.0588	6.3	7.3
	PT1L2AA-2R6PBP	Blister Pack	2R6P	248 x 120 x 50	185	48	49.5 x 36 x 33	0.0588	7.7	8.7
PT1L2D	PT1L2DBP	Blister Pack	/	305 x 175 x 70	245	24	50.5 x 45 x 33	0.075	6.7	7.7
	PT1L2D-2R20PBP	Blister Pack	2R20P	305 x 175 x 70	245	24	50.5 x 45 x 33	0.075	10.7	11.7
RS931	RS931-CBH	Box	21700	123 x 38 x 190	190	48	54 x 35.5 x 29	0.0556	10.2	12.9
RS935	RS935-CBH	Box	21700	85 x 46 x 160	130	80	51 x 29.5 x 39	0.0587	14.5	15.5
RS940	RS940-CBH	Box	/	68 x 30 x 223	45	80	42 x 34.5 x 32	0.0464	7.4	8.6
RT254	RT254-CBH	Box	/	85 x 40 x 160	/	96	55.5 x 30 x 39.5	0.0658	8.3	9.3
RS903	RS903-CBH	Box	/	85 x 40 x 190	60	48	54.5 x 35.5 x 21	0.0406	4.8	5.9
RS920	RS920-CBH	Box	/	85 x 40 x 190	57	60	43.5 x 35.5 x 32	0.0494	5.8	7.1
RS921	RS921-CBH	Box	Li-ion 103450	130 x 50 x 135	125	40	56 x 31.5 x 31	0.0547	7.5	8.7
RS930	RS30-CBH	Box	Li-ion 14500	85 x 42 x 190	60	48	39.5 x 35.5 x 32	0.0449	4.8	6.4
RS218	RS218-CBH	Box	/	85 x 37 x 192	60	48	52 x 36 x 20	0.0374	4.5	6
RT256	RT256-CBH	Box	/	85 x 44 x 192	70	48	60 x 36.5 x 21	0.0460	6	7
S801	S801-3LR03-CBH	Box	3LR03	85 x 50 x 190	51	48	36 x 35 x 43	0.0542	5.5	7.4
S808	S808-3LR03-DB	Blister Pack	3LR03	120 x 197 x 36	43	60	45 x 38 x 44	0.0752	6.5	7.9
RS901	RS901-CB	Box	/	83 x 83 x 105	120	60	44 x 36.5 x 34.5	0.0554	9.8	11.2
RS909	RS909-CB	Box	/	110 x 110 x 146	205	40	59 x 48 x 32	0.0906	11	12.7
RS243	RS243-CB	Box	/	120 x 120 x 191	240	32	50.5 x 50.5 x 41	0.1046	10.5	12
S245	S245-3R6P-CB	Box	3R6P	120 x 120 x 185	200	32	52.5 x 51 x 40.5	0.1084	10.8	11.8
RS225	RS225-CB	Box	/	200 x 130 x 130	545	/	44 x 44 x 42	0.0776	12	13.5
RS932	RS932-CB	Box	/	165 x 90 x 135	245	40	57 x 48.5 x 37	0.1023	12.8	14.6
S32	S32-3R6PCB	Box	3R6P	185 x 105 x 148	325	6	38.5 x 33 x 17	0.0216	2.4	3
S90C	S90C-4R6P-CB	BOX	4R6P	150 x 105 x 118	216	24	47 x 44 x 26	0.0538	8.2	8.8
RS915	RS915-CBH	Box	/	123 x 48 x 158	230	40	55.5 x 29 x 28	0.0451	11.2	12
RS916	RS916-CBH	Box	/	123 x 48 x 158	230	40	55.5 x 29 x 29	0.0451	11.2	12
RS919	RS919-CB	Box	/	182 x 120 x 145	180	30	64 x 39 x 52	0.1298	9.8	10.8
RS919S	RS919S-CB	Box	/	182 x 120 x 145	180	40	64 x 39 x 63	0.1572	13	14
RS917A	RS917A-CB	Box	/	66 x 66 x 180	55	60	42 x 38.5 x 42.5	0.0687	5.6	7.6
S66	S66-3LR03TB	Blister Pack	3LR03	140 x 96 x 30	56	48	37 x 27.5 x 35	0.0356	5.4	6.2
S835	S385-3R03PD12	Display Box	3R03P	280 x 195 x 118	73	48	41 x 30 x 26	0.0320	5.4	6.2
S816	S816-DB	Blister Pack	/	112 x 165 x 41	29	240	50 x 39 x 63	0.1229	9.5	11.5
T220L	T220L-2R03P-DB	Blister Pack	2R03P	114 x 229 x 18	25	100	48 x 40 x 25	0.0480	7	8.3

Empower Every Possibility with More Energy Solutions

Camelion has been providing energy solutions to customers worldwide for over 29 years. As one of the most influential energy solution brands in the global market, Camelion is now actively operating in over 120 countries and regions in collaboration with our business partners. Our mission is to satisfy our customers with the finest quality products, customer-friendly price and thoughtful services. Whenever and wherever you are in need, we are always ready for your help with all the energy solutions you need.



Camelion Battery Co., Ltd.

Unit 705, Cyber Times Tower A, Tianan Cyber Park,
Futian, Shenzhen, Guangdong, China

Camelion Enterprises Ltd.

Block 8, 3/F, Sunray Industrial Centre,
610 Cha Kwo Ling Road , Kowloon, Hong Kong

For more information about Camelion, please visit www.camelionbattery.com

Camelion is a registered trademark of Camelion Battery Co., Ltd.
All other brand names are trademarks or registered trademarks of the respective companies.
Copyright ©2026 Camelion Battery Co., Ltd. All rights reserved.



www.camelionbattery.com

CA-FL-2026-A